
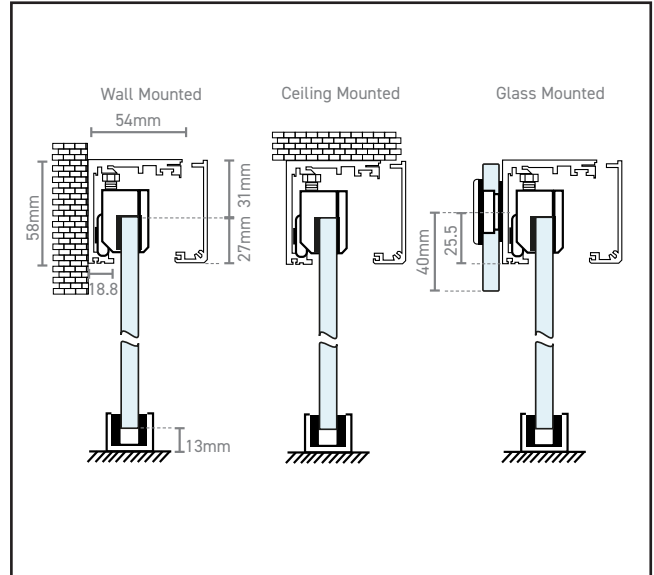


570.8003.01

UG Concealed Double Sliding Door Kit - 4000mm Track Length - 150kg

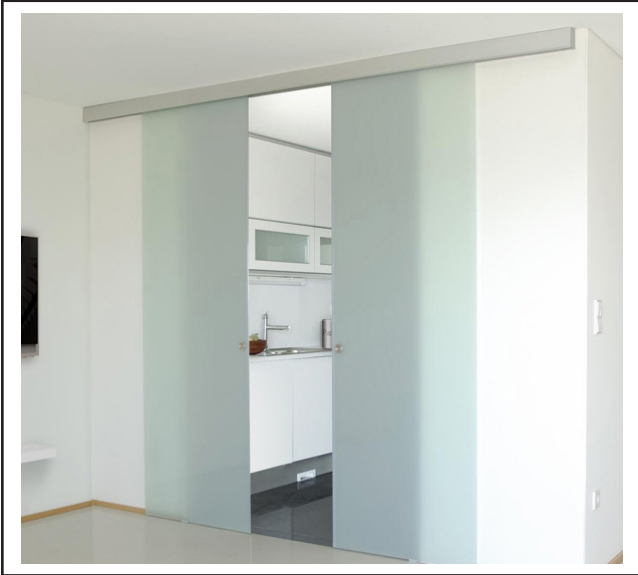


Product Specification

Double Door
150kg Max. Weight per leaf
End Caps - x2

Stops - x4
Floor Guide - x2
Carrier - x4

Anti-falling

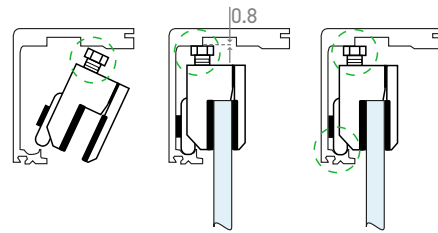

Specification

Finish	Satin Stainless Steel
Track Length	4000mm
Type	Double Door
Max Door Weight	150kg
Cycle Tested	100,000
Glass Thickness	10-12mm

Our new UG sliding glass door system, which covers a wide range of applications and includes options such as soft-close and synchro-opening/closing.

EN 1527 approved - tested to 100,000 cycles ensuring long durability with silent movement

One adjustable screw for +/-1/8" (3.5mm) height adjustment and the anti-falling in front system

A single track that is suitable for wall, ceiling and glass mounted applications

Made to measure carriage and track length, cutting options available

Create a sliding door system that suits each project requirement with our technical advisors, from a rubber stopper to hydraulic soft closing stopper or synchronized double door system, we are here to help. The UG sliding door system is ideal for a range of uses in offices, living spaces and pocket doors, designed with no visible clamping as the parts are hidden within the compact tracking.

For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ