
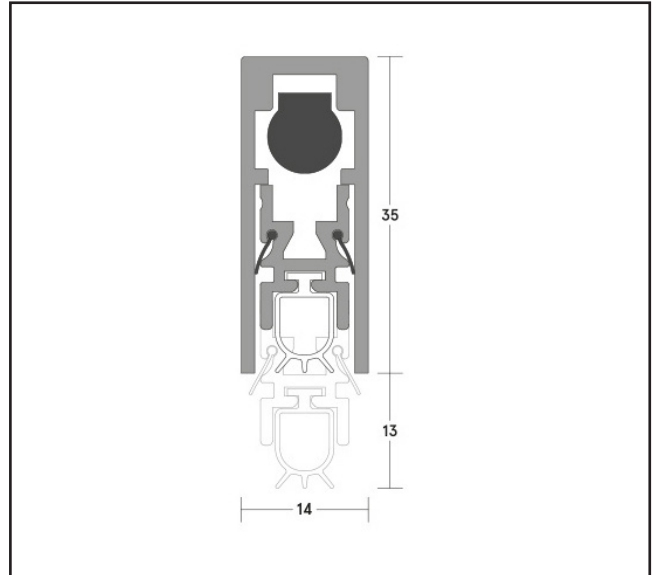


LAS8002 SI DROP SEAL

FACE-FIXED OR SEMI-MORTISED - Max Cut Down 100mm

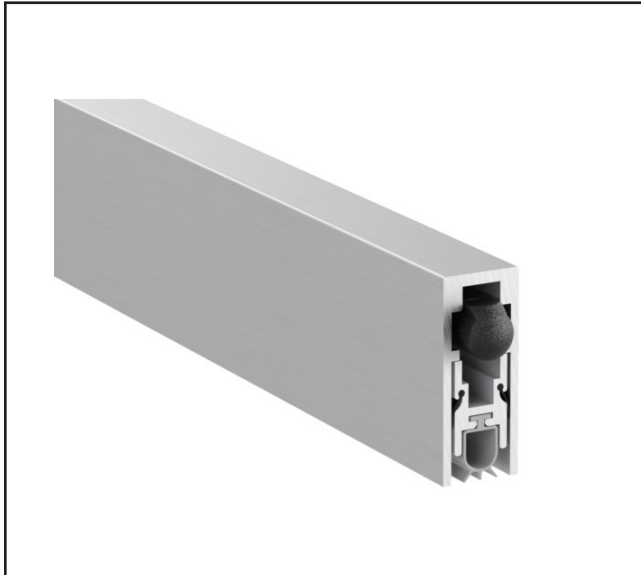


A slimline, face-fixed or semi-mortised automatic drop seal. It features a high efficiency mechanism, which lifts the seal clear of the floor as soon as the door is opened by a few millimetres; resulting in lower door operating forces. Surface mounted application suitable for upgrading existing doors. Requires no power connection. Self-levelling on uneven floors; seal height can be adjusted independently of fixing screws.

Product Code	Overall Length	Min Length	Min Gap	Max Gap	Acoustic Rating	Finish
710.8335.11	335mm	225mm	1mm	13mm	38 Db Rw	Silver
710.8435.11	435mm	335mm				
710.8535.11	535mm	435mm				
710.8635.11	635mm	535mm				
710.8735.11	735mm	635mm				
710.8835.11	835mm	735mm				
710.8935.11	935mm	835mm				
710.1035.11	1035mm	935mm				

KEY FEATURES
Single swing, single + double leaf doors. For use on both right + left handed doors
Self-levelling on uneven surfaces - can be adjusted independently of the fixing screws
Meets smoke requirement: BS 9999:2017. Suitable for use on timber fire doors (face-fixed only)
CERTIFIRE - CF5179

Max Cut Down 100mm

Acoustic: BS EN ISO 10140-2: 2010 (up to Rw 31dB). Smoke: BS EN 1634-3: 2004 & BS 476-31.1: 1983

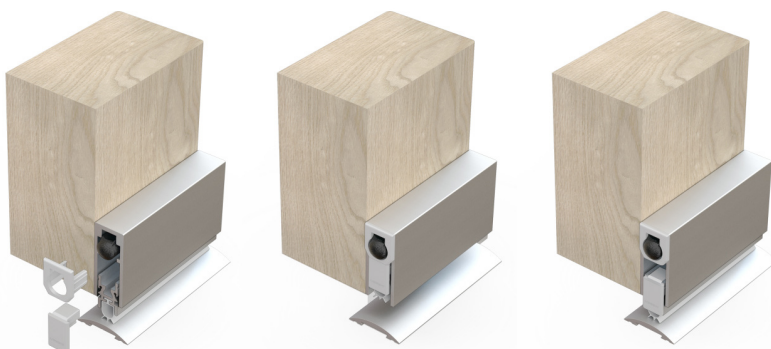

For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ