
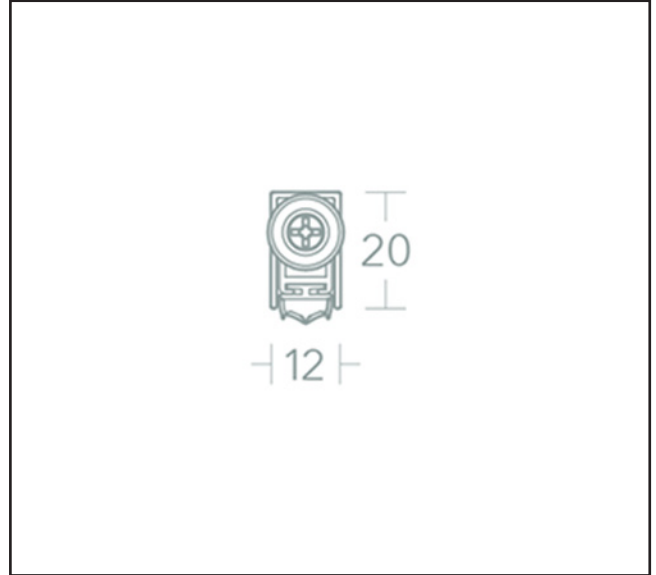


NOR810S

Mortice Drop Down Seal

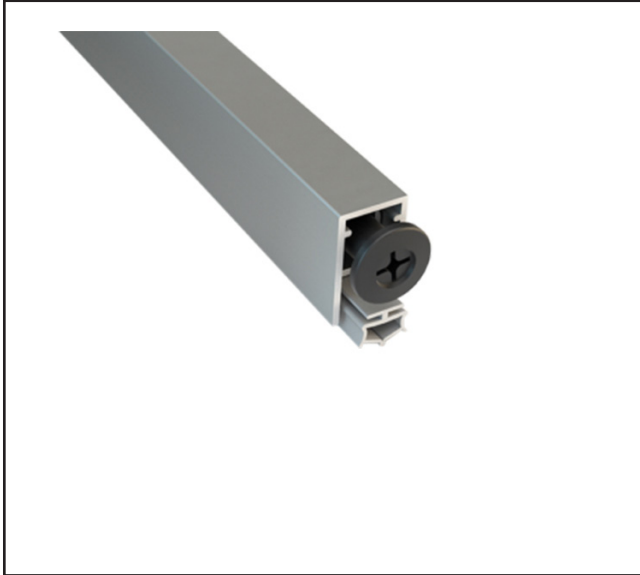

Product Specification

Application Bottom edge of acoustic timber doorsets

Fixing Rebated, held in place with end caps

Actuation Single

Drop down, maximum 12mm

Product Code	Overall Length	Cut Down Length	Max Cut Down	Finish
710.8104.11	425mm	285mm	140mm	Silver
710.8105.11	525mm	375mm	150mm	
710.8106.11	625mm	475mm		
710.8107.11	725mm	575mm		
710.8108.11	825mm	675mm		
710.8109.11	925mm	775mm		
710.8101.11	1025mm	875mm		
Drop down, maximum 12mm				

KEY FEATURES

Suitable for use on most fire doors Compliant with BS 476-22
UL Approval Smoke tested in accordance with BS 476-31.1
Acoustically tested in accordance with BS EN ISO 10140-2 Certifire CF629 1,000,000 cycle tested. Self levelling

For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ