


550.6095.02

609 Ball Bearing Butt Hinge - Grade 13 - Square Corners - Pack of 3

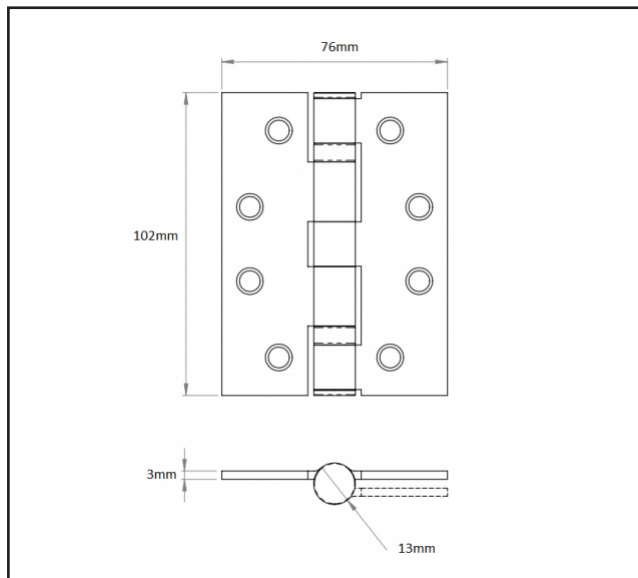

Product Specification

BS EN 1935

BS EN 1634

CE / Certifire approved

Intumescent hinge pads should be used when installing on fire doors

To achieve FD30 or FD60 and comply with fire test evidence - 2 x 0.8mm hinge pads per hinge. One Intumescent hinge pad to be behind frame hinge leaf and one behind door hinge leaf.

Specification

| | |
|--------------------|----------------------------------|
| Finish | Polished Stainless Steel |
| Diameter | 102 x 76 x 3mm |
| Grade | Grade 13 |
| Max Door Weight | 120kg Adjusted Weight (3 hinges) |
| Screws Included | Yes |
| CE Marked | Yes |
| Fire Rated | FD30 & FD60 |
| Certifire Approved | Yes |
| Sold as | Pack of 3 |

For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ