


550.6097.01

609 Ball Bearing Butt Hinge - Grade 13 - Radius Corners - Pack of 3

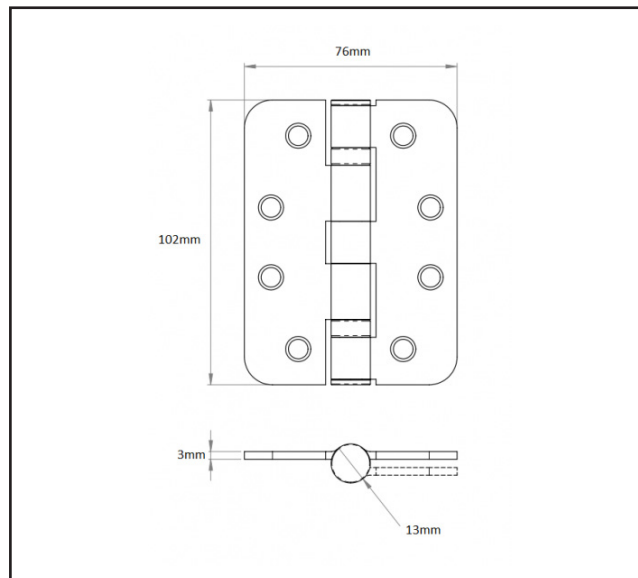

Product Specification

BS EN 1935

BS EN 1634

CE / Certifire approved

Intumescent hinge pads should be used when installing on fire doors

To achieve FD30 or FD60 and comply with fire test evidence - 2 x 0.8mm hinge pads per hinge. One Intumescent hinge pad to be behind frame hinge leaf and one behind door hinge leaf.

Specification

Finish	Satin Stainless Steel
Corners	Radius
Size	102 x 76 x 3mm
Grade	Grade 13
Max Door Weight	120kg Adjusted Weight (3 hinges)
Screws Included	Yes
CE Marked	Yes
Fire Rated	FD30 & FD60
Certifire Approved	Yes
Sold as	Pack of 3

For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ