

500.5079.11

5079 EN2-4 Overhead Door Closer



Product Specification

Latching and closing speed control
FD60 on Timber Doors
Standard and parallel arm configuration



Specification

Finish	Silver						
Power Size	Variable power EN2-4						
Max Door Width	1100mm						
Max Door Weight	80kg						
Adjustable Backcheck	Yes						
Delayed Action	Yes - 20 second 'delay action'						
Fire Rated	FD60						
Tested	EN 1154 tested to <table border="1"><tr><td>3</td><td>8</td><td>$\frac{2}{4}$</td><td>1</td><td>1</td><td>2</td></tr></table>	3	8	$\frac{2}{4}$	1	1	2
3	8	$\frac{2}{4}$	1	1	2		
Tested	EN 1634						
Certifire Approved	Yes - CF10139						
Cylce Tested	500,000						
Salt Spray Test	48 Hour salt spray test						
Size	248mm x 40mm						
Guarantee	10 year mechanical guarantee						


For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ

80 Kg	1100mm	4
60 Kg (Minimum for a Fire Door)	950mm	3*
40 Kg	850mm	2
Test Door Mass (kg)	Recommended Door Leaf Width Max mm	Door Closer Power Size
EN1154		

5	+	2-4 Model
0		
3		
2	-	
5		
N° of Turns	Direction	Size

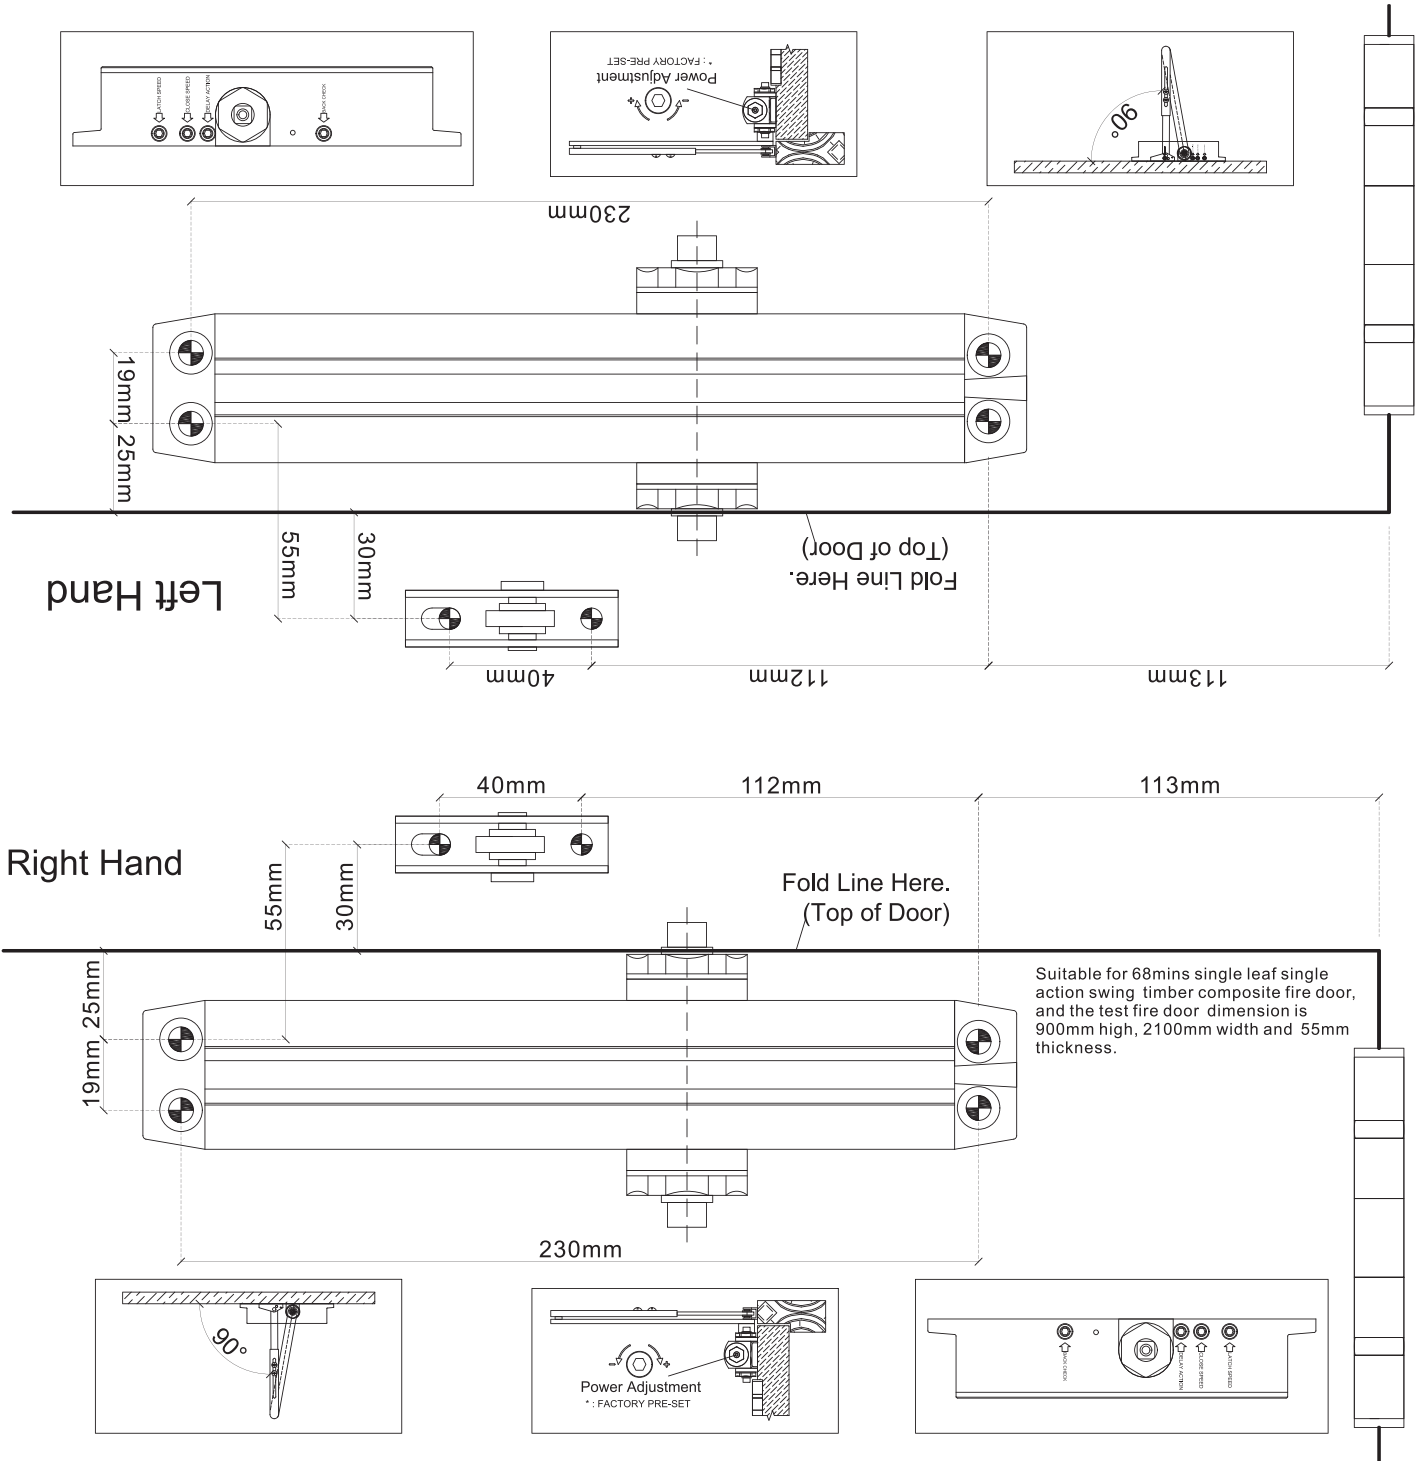

2-4 Model		
N° of Turns	Direction	Size
5	-	2
0		3
5	+	4

EN1154		
Door Closer Power Size	Recommended Door Leaf Width Max mm	Test Door Mass (Kg)
2	850mm	40 Kg
3*	950mm	60 Kg (Minimum for a Fire Door)
4	1100mm	80 Kg