

8 x 20 mm | 12 mm | 49 dB

Planet TW, RD (smoke-shielding), 835 mm, can be shortened to 710 mm

Overview of Advantages

- Drop-down seal for metal, wood and PVC doors
- Ideal for particularly narrow doors or confined spaces
- Drop height up to 12 mm
- Sound absorption level up to 49 dB with optimal sealing
- Unilateral and silent actuation
- No scraping / trailing on the floor, thanks to parallel drop
- Automatic compensation of sloped floors
- High-quality silicone lip, lateral protrusion adjustable
- Easy drop height adjustment
- Can be shortened to the next smaller stock length
- 7-year warranty

Incl. accessories

Planet assembly set TW/US for metal, incl. 2 mounting brackets (stainless steel), 4 screws and stopping plate, type 1 (stainless steel)

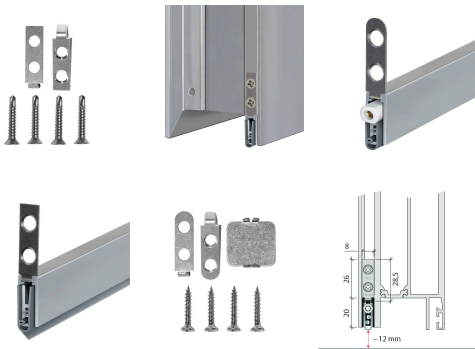
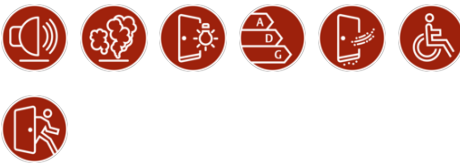
Tender specification

Automatic door drop-down seal Planet TW RD | 49 dB, for sound and smoke-shielding protection doors, hinge-side triggering with automatic compensation for sloping floors, parallel lowering, seal height up to 12 mm. Side attachment, silicone lip. Aluminium profile 8 x 20 mm.

Technical data

Groove size	8,3 mm wide and 20.5 mm deep
Seal profile	high-quality silicone or high-quality self-extinguishing silicone
Sound absorption value	up to 49 dB at ground air 7 mm
Frame protector plate	stainless steel, for knocking in, 20 x 20 mm
Fastening	with stainless steel mounting brackets and screws on the side
Can be shortened	max. 125 mm
Release	on one side, hinge side
Drop height adjustment	on release pin with 3 mm Allen key
Max. drop height	12 mm
Profile size	8 x 20 mm
Profile material	aluminium
Version	smoke-shielding
Length	835 mm
can be shortened to	>710 mm

Article number	20084
EAN	7612231020707

**Features / versions (depending on options)****Floor surfaces****Possible door types (depending on options)**