

Planet KT, RD (smoke-shielding), 960 mm

13 x 25 mm | 18 mm | 48 dB

Planet KT, RD (smoke-shielding), 960 mm, can be shortened to 835 mm

Overview of Advantages

- Drop-down seal for wooden, metal and PVC doors
- Drop height up to 18 mm
- Sound absorption level up to 48 dB with optimal sealing
- Deeper recess allows for protection of the silicone lip
- Unilateral and silent actuation
- No scraping / trailing on the floor, thanks to parallel drop
- Automatic compensation of sloped floors
- Also for double doors with flush bolt or shoot bolt
- High-quality silicone lip, lateral protrusion adjustable
- Easy drop height adjustment
- Can be shortened to the next smaller stock length
- 7-year warranty

Incl. accessories

Planet HS assembly set with 2 mounting brackets (stainless steel), 4 screws and stopping plate type 1 (stainless steel)


Tender specification

Automatic door drop-down seal Planet KT RD | 48 dB, for sound and smoke-shielding protection doors, hinge-side triggering with automatic compensation for sloping floors, parallel lowering, seal height up to 18 mm, flush or deeper with lip protection for grooving. Silicone lip, side attachment. Profile made of aluminium 13 x 25 mm.


Technical data

Groove size	13,3 mm wide and 25.5 to 35 mm deep
Seal profile	high-quality silicone or high-quality self-extinguishing silicone
Sound absorption value	up to 48 dB at ground air 7 mm
Frame protector plate	stainless steel, for knocking in, 20 x 20 mm
Fastening	with stainless steel mounting brackets and screws on the side
Can be shortened	max. 125 mm (335 mm only 115 mm)
Release	on one side, hinge side
Drop height adjustment	on release pin with 3 mm Allen key
Max. drop height	18 mm
Profile size	13 x 25 mm
Profile material	aluminium
Version	smoke-shielding
Length	960 mm
can be shortened to	>835 mm

Article number	30096
EAN	7612231006329



Features / versions (depending on options)

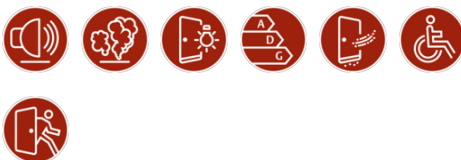

Floor surfaces



Possible door types (depending on options)

