
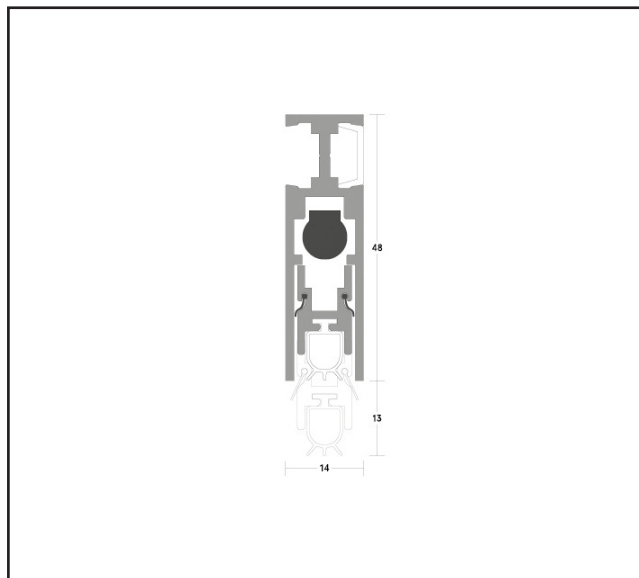


710.80

LAS8003 SI DROP SEAL - FACE-FIXED OR SEMI-MORTISED

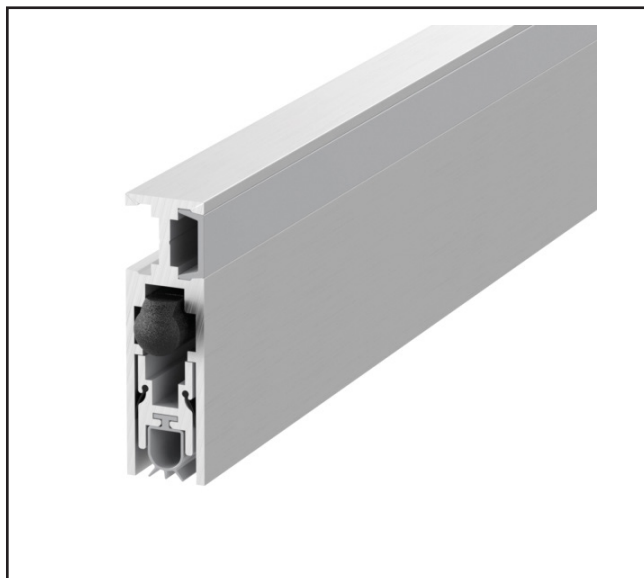

Product Specification

A slimline, face-fixed or semi-mortised automatic dropseal. It features a high efficiency mechanism, which liftsthe seal clear of the floor as soon as the door is openedby a few millimetres; resulting in lower door operatingforces. Surface mounted application suitable forupgrading existing doors. Requires no power connection.Self-levelling on uneven floors; seal height can beadjusted independently of fixing screws.

Product Code	Overall Length	Min Length	Min/Max Gap	Finish
710.8034.11	335mm	255mm	1mm/13mm	Silver anodised aluminium
710.8035.11	435mm	335mm		
710.8036.11	535mm	435mm		
710.8039.11	635mm	535mm		
710.8003.11	735mm	635mm		
710.8013.11	835mm	735mm		
710.8023.11	935mm	835mm		
710.8033.11	1035mm	935mm		
710.8037.11	1135mm	1035mm		
Single swing, single + double leaf doors. For use on both right + left handed doors Self-levelling on uneven surfaces. Can be adjusted independently of the fixing screws				

KEY FEATURES

Smoke: BS 476-31.1: 1983 at ambient temperature.
Acoustic: BS EN ISO 10140-2: 2010 (up to Rw 33dB)

Meets smoke requirement: BS 9999: 2017

V2-25022025

For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ