


720.6001.37

1mm Fire Rated Packer (Pack of 100)

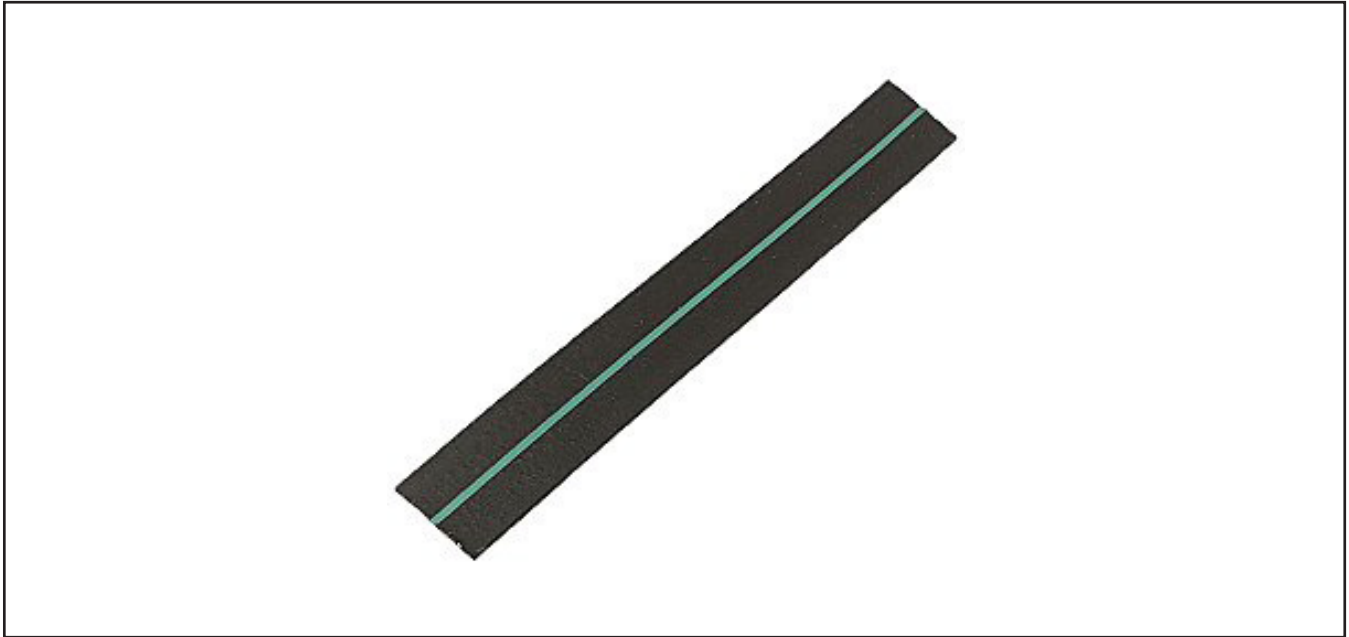

Fire Rated Packers to be used in conjunction with the Blue 60 Fire Rated Frame Foam.
Suitable for both timber and metal stud partitionings
Tested in gaps between 7mm and 30mm
Tested with softwood, MDF and hardwood frame sections
Ability to combine different thicknesses to achieve a proper fitting
Must be used with Blue 60 Fire Rated Foam to maintain fire rating certification

Specification

Sold as	Pack 100
Colour	Green
Thickness	1mm
Length	100mm
Width	15mm
Fire Rated	FD30 and FD60
Fire Tested	BS-EN 1634-1 & BS476-22
Acoustic Tested	43db

720.6002.37

3mm Fire Rated Packer (Pack of 100)



Fire Rated Packers to be used in conjunction with the Blue 60 Fire Rated Frame Foam.
Suitable for both timber and metal stud partitionings
Tested in gaps between 7mm and 30mm
Tested with softwood, MDF and hardwood frame sections
Ability to combine different thicknesses to achieve a proper fitting
Must be used with Blue 60 Fire Rated Foam to maintain fire rating certification

Specification

Sold as	Pack 100
Colour	White
Thickness	3mm
Length	100mm
Width	15mm
Fire Rated	FD30 and FD60
Fire Tested	BS-EN 1634-1 & BS476-22
Acoustic Tested	43db

720.6003.37

5mm Fire Rated Packer (Pack of 100)



Fire Rated Packers to be used in conjunction with the Blue 60 Fire Rated Frame Foam.
Suitable for both timber and metal stud partitionings
Tested in gaps between 7mm and 30mm
Tested with softwood, MDF and hardwood frame sections
Ability to combine different thicknesses to achieve a proper fitting
Must be used with Blue 60 Fire Rated Foam to maintain fire rating certification

Specification

Sold as	Pack 100
Colour	Blue
Thickness	5mm
Length	100mm
Width	15mm
Fire Rated	FD30 and FD60
Fire Tested	BS-EN 1634-1 & BS476-22
Acoustic Tested	43db

For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ