

DROP DOWN SEALS

SURFACE MOUNTED DROP SEAL

Product Code	Length	Max Cut Down Length	Max Cut Down	Fire Rating
710.0097.11	430mm	310mm	120mm	FD30 & FD60
710.1530.11	530mm	380mm	150mm	FD30 & FD60
710.0325.11	630mm	480mm		
710.0330.11	730mm	580mm		
710.0335.11	830mm	680mm		
710.0430.11	930mm	780mm		
710.0435.11	1030mm	880mm		
710.0440.11	1130mm	980mm		
710.0445.11	1230mm	1080mm		

Acoustic testing undertaken in accordance with BS EN ISO 140-3:1995 achieving a rating of up to 37dB Rw.

KEY FEATURES
Seal Drop Length 3-14mm Size 40x13mm Satin Anodised Aluminium Sold as each
Tested 37dB Rw
Fire tested to BS476: Part 20/22: 1987 to 60 minutes
Smoke tested to BS EN 1634-3: 2004




MORTICE DROP DOWN DOOR SEAL

Product Code	Length	Max Cut Down Length	Max Cut Down	Fire Rating
710.0935.11	430mm	330mm	100mm	FD30 & FD60
710.0530.11	530mm	430mm		
710.0630.11	630mm	530mm		
710.0930.11	730mm	630mm		
710.0835.11	830mm	730mm		
710.1000.11	930mm	830mm		
710.0830.11	1030mm	930mm		
710.0832.11	1130mm	1030mm		
710.0831.11	1230mm	1130mm		

Acoustic testing undertaken in accordance with BS EN ISO 140-3:1995 achieving a rating of up to 37dB Rw.

KEY FEATURES
Seal Drop Length 3-14mm Size 13mm x 28mm Satin Anodised Aluminium Sold as each
Tested 37dB Rw
Fire tested to BS476: Part 20/22: 1987 to 60 minutes
Smoke tested to BS EN 1634-3: 2004

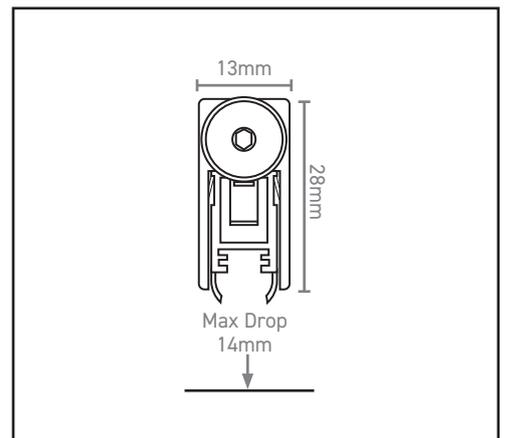

For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ