

720.0001.28

Graphite Intumescent Hinge Pads - Radius Corner



Product Specification

Sold as each, 2nr required per hinge

It is recommended that these are used with all fire rated butt hinges
0.8mm flexible material

Suitable for 102 x 76mm radius cornered butt hinges

To achieve FD30 or FD60 and comply with fire test evidence - 2 x 0.8mm hinge pads per hinge.

One Intumescent hinge pad to be behind frame hinge leaf and one behind door hinge leaf.

Specification

Finish	Black
Corners	Radius
Height	102mm
Width	30mm
Thickness	0.8mm
Fire Rated	Yes
Sold as	Each (2nr Required Per Hinge)
	Intumescent Pads Only. Self-adhesive backing.


For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ

720.0002.28

Graphite Intumescent Hinge Pads - Square Corner

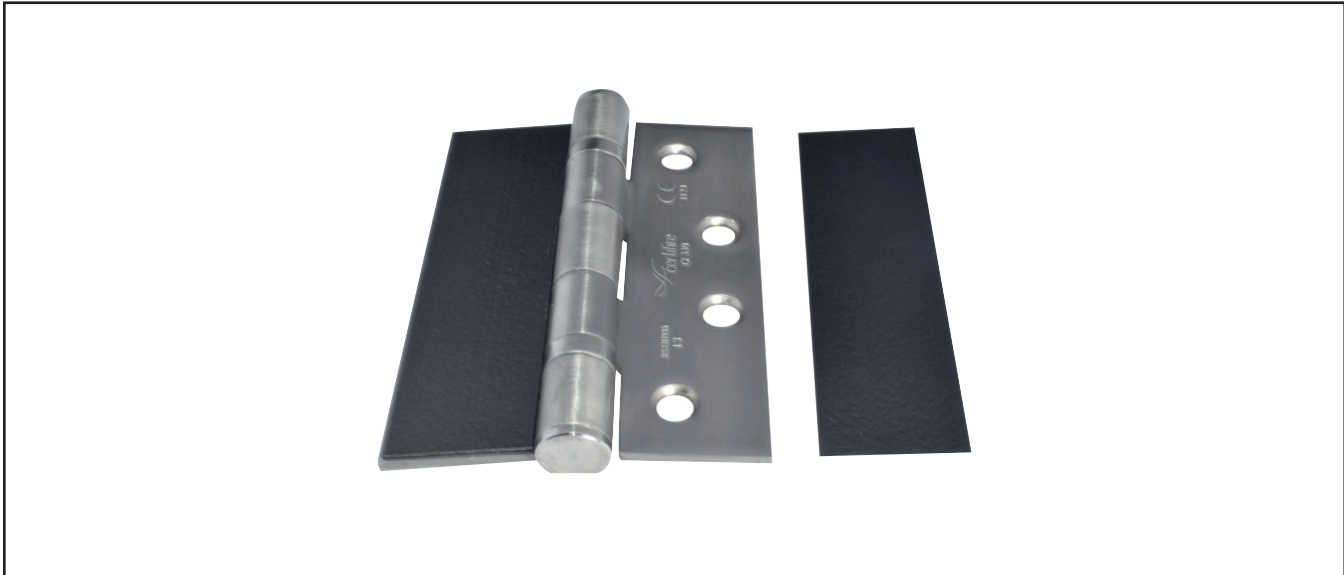

Product Specification

Sold as each, 2nr required per hinge

It is recommended that these are used with all fire rated butt hinges
0.8mm flexible material

Suitable for 102 x 76mm Square cornered butt hinges

To achieve FD30 or FD60 and comply with fire test evidence - 2 x 0.8mm hinge pads per hinge.

One Intumescent hinge pad to be behind frame hinge leaf
and one behind door hinge leaf.

Specification

Finish	Black
Corners	Radius
Height	102mm
Width	30mm
Thickness	0.8mm
Fire Rated	Yes
Sold as	Each (2nr Required Per Hinge)
	Intumescent Pads Only. Self-adhesive backing.


For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ

720.0003.28

Graphite Intumescent Hinge Pads - Square Corner

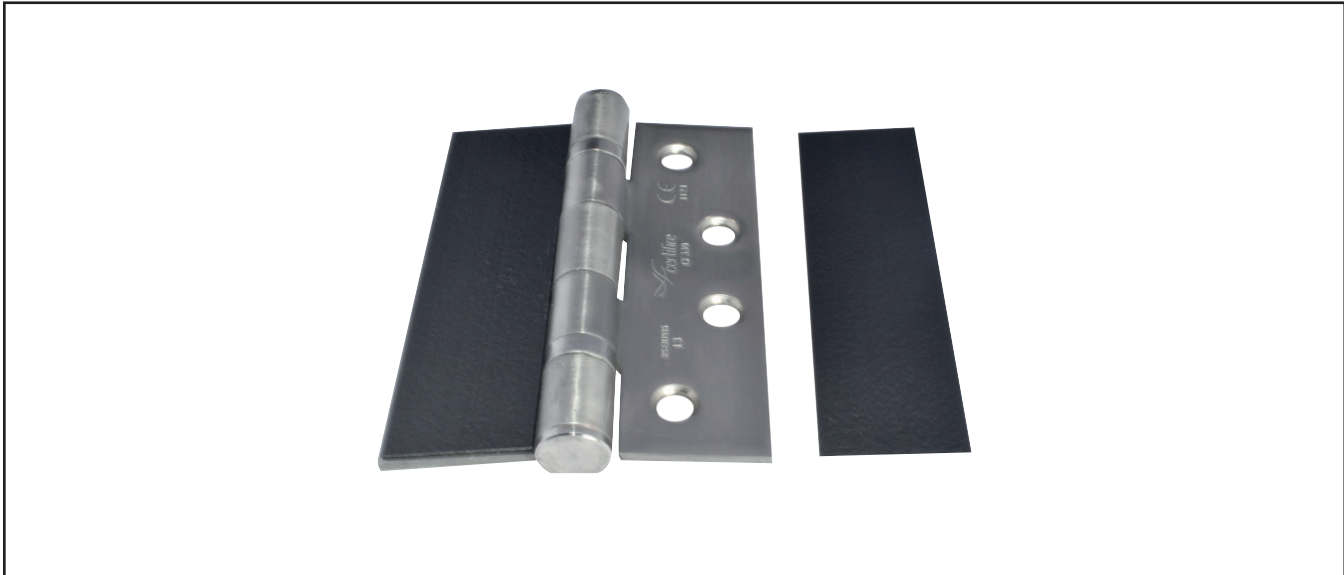

Product Specification

Sold as each, 2nr required per hinge
It is recommended that these are used with all fire rated butt hinges
0.8mm flexible material

To achieve FD30 or FD60 and comply with fire test evidence - 2 x 0.8mm hinge pads per hinge. One Intumescent hinge pad to be behind frame hinge leaf and one behind door hinge leaf.

Specification

Finish	Black
Corners	Radius
Height	102mm
Width	36mm
Thickness	0.8mm
Fire Rated	Yes
Sold as	Each (2nr Required Per Hinge)
	Intumescent Pads Only. Self-adhesive backing.


For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ

720.0004.28

Graphite Intumescent Hinge Pads - Square Corner

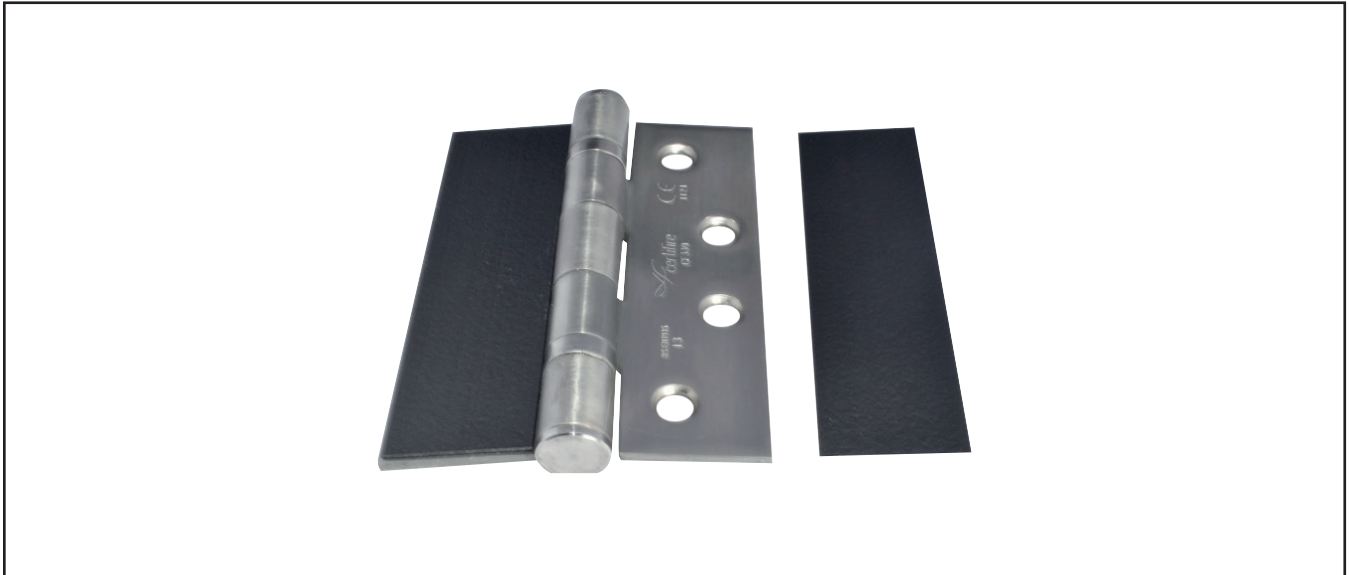

Product Specification

Sold as each, 2nr required per hinge

It is recommended that these are used with all fire rated butt hinges

0.8mm flexible material

To achieve FD30 or FD60 and comply with fire test evidence - 2 x 0.8mm hinge pads per hinge. One Intumescent hinge pad to be behind frame hinge leaf and one behind door hinge leaf.

Specification

Finish	Black
Corners	Radius
Height	102mm
Width	42mm
Thickness	0.8mm
Fire Rated	Yes
Sold as	Each (2nr Required Per Hinge)
	Intumescent Pads Only. Self-adhesive backing.


For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ

720.0009.28

Graphite Intumescent Hinge Pads - Square Corner

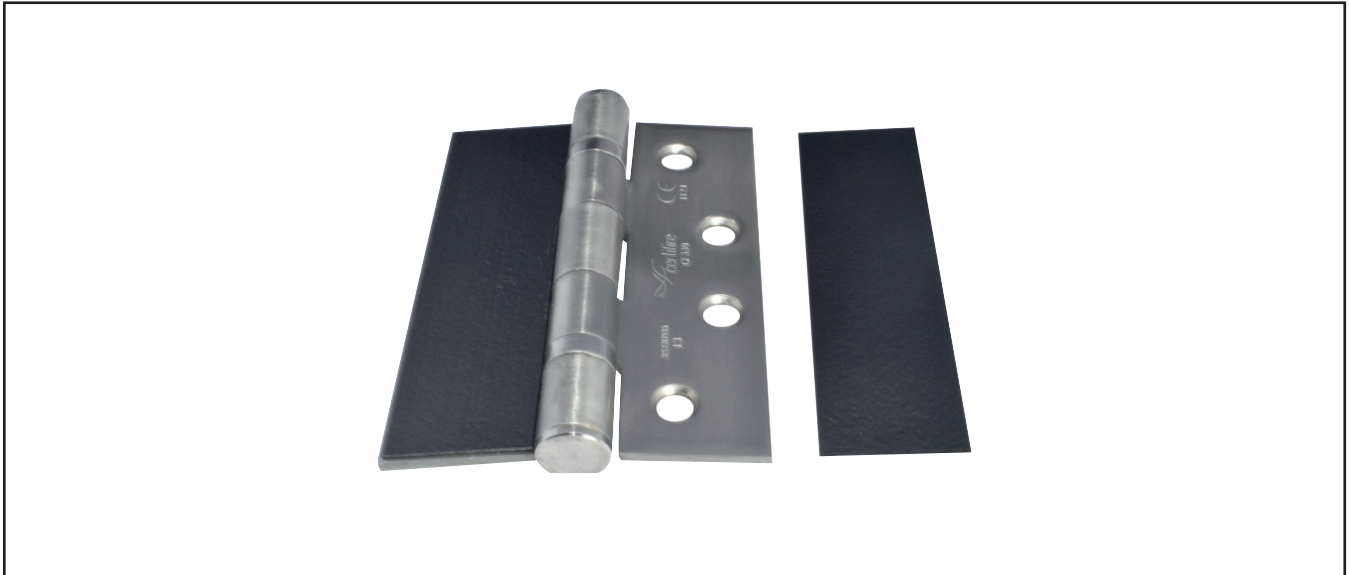

Product Specification

Sold as each, 2nr required per hinge

It is recommended that these are used with all fire rated butt hinges
0.8mm flexible material

To achieve FD30 or FD60 and comply with fire test evidence - 2 x 0.8mm hinge pads per hinge.

One Intumescent hinge pad to be behind frame hinge leaf and one behind door hinge leaf.

Specification

Finish	Black
Corners	Square
Height	75mm
Width	18mm
Thickness	0.8mm
Fire Rated	Yes
Sold as	Each (2nr Required Per Hinge)
	Intumescent Pads Only. Self-adhesive backing.

For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ