


ECLISSE FIRE RATED CLASSIC SINGLE POCKET DOOR SYSTEM

Product Code	Door Width	Door Height	Door Thickness	Fire Rated
810.8000.11	838mm	1981mm	44mm	FD30
810.2300.11	926mm	2040mm		

Complete with special jamb/architrave kit made from hard wood, pre-treated with intumescent primer. Maintenance-free track and runners. Fully adjustable front and rear doorstop. Runners are tested to 100,000 cycles. Anti-warp door profile. Self-centering floor guide. Channels routed out in jambs to accept standard 15 x 4mm graphite based intumescent seals available separately. Doors NOT Supplied

KEY FEATURES


Pocket Door
 Finished Wall Thickness
 100mm
 Max Door Weight:
 100kg without self-closer 40kg with self closer

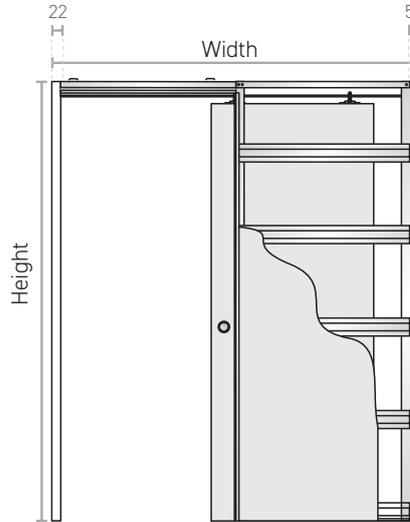

ECLISSE SELF-CLOSING MECHANISM FOR FIRE RATED POCKET DOOR KITS

Product Code	Type	Fire Rated
810.1401.11	Self Close Kit	FD30

This self-closing kit is completely enclosed inside the system, which allows the door to close by itself. The mechanism can be installed retrospectively. Max door weight when using this mechanism is reduced to 40kg with our fire rated pocket door systems. Closing door speed can be adjusted without removing door or jambs. Installing the self closing system will reduce the passage size by only 8-10mm. For use with wooden doors only.

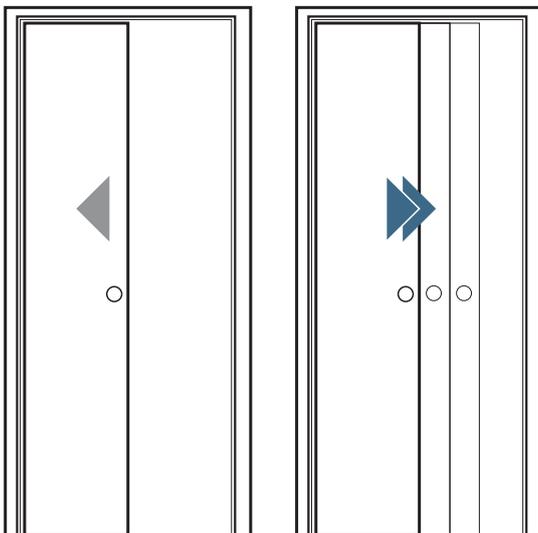

For more information please contact

01451 824110 | sales@wellinguk.com | www.wellinguk.com

Welling Ironmongery Ltd, Unit R1, Bourton Industrial Park, Bourton on the Water GL54 2HQ