


CYLINDERS

SATIN NICKEL - EURO PROFILE CYLINDERS

Product Code	Key System	Dimensions	Length	Description
600.1912.05	UMK C7	35/10	45mm	Single Cylinder
600.4912.05	KTD	35/10	45mm	
600.4912.05	CKA13	35/10	45mm	
600.1511.05	UMK C7	30/30	60mm	Double Cylinder
600.1512.05	UMK C7	35/35	70mm	
600.4511.05	KTD	30/30	60mm	Double Cylinder
600.4512.05	KTD	35/35	70mm	
600.4513.05	KTD	40/40	80mm	
600.8512.05	CKA13	35/35	70mm	Double Cylinder
600.1611.05	UMK C7	30/30	60mm	Cylinder & Turn
600.1612.05	UMK C7	35/35	70mm	
600.1613.05	UMK C7	40/40	80mm	
600.4611.05	KTD	30/30	60mm	Cylinder & Turn
600.4612.05	KTD	35/35	70mm	
600.4613.05	KTD	40/40	80mm	
600.8611.05	CKA13	30/30	60mm	Cylinder & Turn
600.8612.05	CKA13	35/35	70mm	
600.8613.05	CKA13	40/40	80mm	

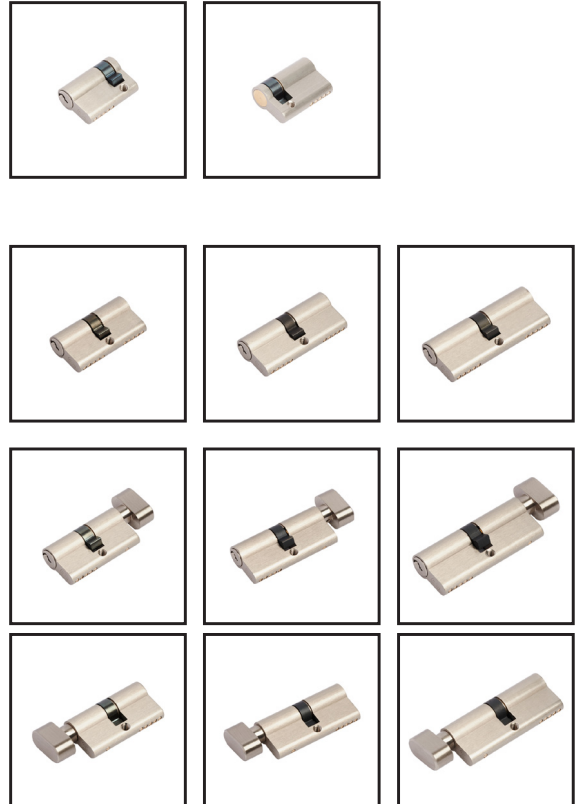

With 3 Keys as Standard

KTD - KEYED TO DIFFER


Each cylinder has its unique keys and will not operate other cylinders

CKA13 - KEYED ALIKE

each cylinder has its own keys, which will operate all cylinders under CKA13 group. This applies across the several finishes in the CKA13 group of the Certus range

UMK C7 - UNDER MASTER KEY SYSTEM 7

under master key system 7 – cylinder comes with 3no differ keys unique to that cylinder. When you purchase the C7 master key, this key will operate all UMK cylinders with reference C7. This applies across the several finishes in the Certus C7 master key range

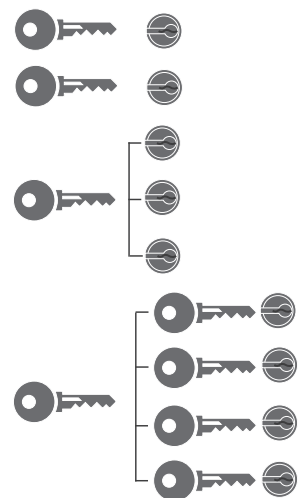

Category of use	Durability	Door mass	Fire resistance	Safety	Corrosion Resistance & temperature	Ker related security	Attack resistance
1	6	0	1	0	C	5	2